



DISCRETE COSINE TRANSFORM FOR ENHANCING THE CONTRAST OF GRAY IMAGE

¹Nivedita V. Deshmukh (Hippalgaonkar)

Lecturer,
E & TC Department,
P.C. Polytechnic, Nigdi, Pune, India

²Dr.S.D.Apte
Guide,

E & TC Department
RSCOE Tathwade Pune,India

Abstract: Enhancement techniques are used to make easier visual interpretations and understanding of image. Various image enhancement algorithms are applied to remotely sensed data to improve the appearance of an image for human visual analysis or machine analysis. In this paper a new method for contrast enhancement based on the discrete cosine transform is discussed and implemented. The technique converts the image into DCT domain and the DCT coefficients are modified using proposed mask then the enhanced image is reconstructed using inverse DCT. The discrete cosine transform outperforms with better image quality and with highest PSNR value.

IndexTerms- Contrast enhancement , PSNR, Discrete cosine transform

I. INTRODUCTION

Image Contrast Enhancement process enhances images quality in which features are hardly detectable by eye. It improves the visualization of features of image. Basically, contrast is developed due to luminance reflected by two surfaces. In satellite, medical field the contrast enhancement techniques are used to enhance the images brightness and contrast. Histogram equalization is one the most well-known method for contrast enhancement. This approach generally useful for images with poor intensity distribution. By enhancing edges in image enhances the contrast. Multi scale edge enhancement approach, takes all resolution levels into account MSR softens the strongest edges and keeps the faint edges almost untouched. The strategies are different, but methods allow the user to see details which were hardly distinguishable in the original image, by reducing the ratio of strong features to faint features. The wavelet approach consists of first transforming the image using the dyadic wavelet transform. Then the two wavelet coefficients relative to the horizontal and vertical wavelet bands are modified by multiplying by constant at scale and at pixel position. Finally, the enhanced image is obtained by the inverse wavelet transform from the modified wavelet coefficients. Wavelet bases present some limitations, because they are not well adapted to the detection of highly anisotropic elements, such as alignments in an image, or sheets in a cube. In DCT approach by modifying DCT coefficients of sub images can enhance the image properly.

II. THEROTICAL FRAMEWORK

In this paper, discrete cosine transform for enhancing the gray image has been proposed

The DCT helps to separate the image into parts with respect to the image's visual quality. As shown in Fig. The popular block-based DCT transform segments an image non overlapping block and applies DCT to each block. It gives result in three frequency sub-bands: low frequency sub-band, mid-frequency sub-band and high frequency sub-band.

DCT based enhancement is based on two facts. The first fact is that much of the signal energy lies at low-frequencies sub-band which contains the most important visual parts of the image. The second fact is that high frequency components of the image and it is noise.

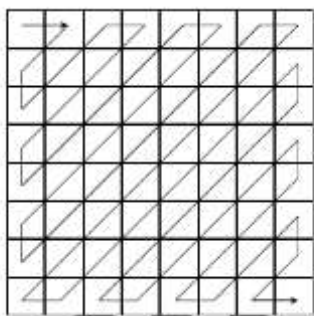


fig.no.1. zigzag ordering of dct coefficients

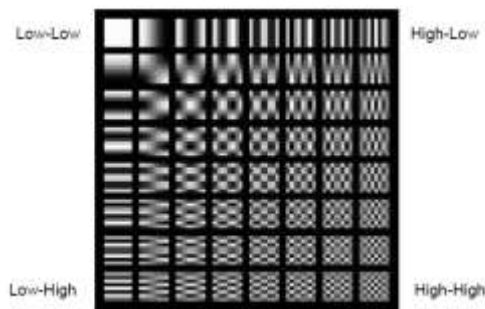


fig.no.2 dct coefficients

III. RESEARCH METHODOLOGY:

In this paper, a technique based on discrete cosine transform has been proposed for enhancing the contrast of gray images. Discrete cosine transform is applied to extract the features of an image. The DCT converts the spatial domain into frequency domain represented by its DCT coefficients. DCT separates higher and lower frequency components in two parts. The important information is present in low frequency DCT coefficients. Hence separating low and high frequency coefficients and modifying DCT coefficients by multiplying proper scaling factor, a new enhanced gray image is obtained. For obtaining enhanced image from modified coefficients inverse DCT is used. Assume A is a gray image, A' is an enhanced image.

m	m	m	m	m	m	m	m
m	m	m	m	m	m	m	N
m	m	m	m	m	m	n	N
m	m	m	m	m	n	n	N
m	m	m	m	n	n	n	N
m	m	m	n	n	n	n	0
m	m	n	n	n	n	0	0
m	n	n	n	n	0	0	0

Fig. no.3 Proposed DCT 8*8 scaling mask

The following are the steps for proposed technique.

Step1: Read a gray image A .

Step2: Divide the input image into 8*8 non-overlapping sub blocks.

Step3: Apply DCT to each sub block.

Step4: Using designed mask each sub block DCT coefficients are modified.

Step5: By applying inverse DCT reconstruct the enhanced image \bar{A} from modified DCT coefficients.

IV. RESULTS AND DISCUSSION

For obtaining better result different scaling factors are analyzed and best scaling factors are used to enhance the image.



Fig.no.4 Discrete Cosine Transform O/P

Table No.1 DCT Scaling factor analysis

Lena.jpg	Scaling Factor		For noiseless image		For noisy image	
	m	n	PSNR	Contrast	PSNR	Contrast
1	0.7000	0.8040	24.1805	0.1660	24.3919	0.7229
2	0.8000	0.8080	24.5534	0.2025	24.7919	0.8022
3	0.9000	0.8120	26.2177	0.2406	26.5022	0.8911
4	1.0000	0.8160	51.6302	0.2937	33.6584	1.0030
5	1.1000	0.8200	75.4320	0.3304	42.0890	1.1002
6	1.2000	0.8240	93.2853	0.3595	47.9023	1.1794
7	1.3000	0.8280	Inf	0.3829	51.9566	1.2449

V. Conclusion:

From above results we conclude that for enhancement of gray image discrete cosine transform outperforms. Using discrete cosine transform obtained highest PSNR value is 96 dB.

References:

[1] IEEE image processing 2001; 10 (3):367-82.Transform-based image enhancement algorithms with performance measure by Agaian s s, Panetta K, Grigoryan AM.

[2] The 2nd International Conference From Scientific Computing to Computational Engineering 2nd IC-SCCE Athens, 5-8 July, 2006 Madoukas Theodore1, Athanasiadis Emmanouil2, Bougioukos Panagiotis2,

Kalatzis Ioannis¹, Dimitropoulos Nikos³ and Cavouras Dionisis¹ ,“Performance Evaluation of A-trous Wavelet based Filters for enhancing Digital Mammography Images”.

[3] The International Journal of Computer Applications (0975 – 8887) Volume 35– No.7, December 2011 a paper was published on “Satellite Image Contrast Enhancement using Multiwavelets and Singular Value Decomposition (SVD)”.

[4] The World Academy of Science, Engineering and Technology 79, 2011 ,“Enhancement of Low Contrast Satellite Images using Discrete Cosine Transform and Singular Value Decomposition “by A. K. Bhandari, A. Kumar and P. K. Padhy.

